



QUASAR PYLON FAIRING RETRO-FITTING INSTRUCTIONS

KIT PACKING LIST

- 1) Pylon fairing with front rubber strip fitted. 4 off plastic screws with plugs + 4 spare screwswitch plugs.
- 2) Head cushion.
- 3) 4 off rubber strips x 50mm.
- 4) 2 off 1" velcro strips.
- 5) 2 off 1" x 5/16" penny washers.
- 6) 1 off M6 nyloc half nut.
- 7) 2 off Quasar decals.
- 8) 3 pages fitting instructions and assembly drawings.

PYLON FITTING INSTRUCTIONS

- 1) Fit rubber strips as shown on sheet [2].
- 2) Remove upper engine cowl and disconnect pull start handle.
- 3) Undo and remove pull start pulley assembly.
- 4) Open fairing at front by undoing plastic screws.
Assemble around pylon from the rear.

NB. The fairing will *just* fit onto the pulley guard when put at its lowest possible position, so it is not necessary to bend the guard. *Take care!*

- 5) Once the fairing is on the pylon, assemble the starter rope through the slot and fit assembly as shown on sheet [3].
- 6) Fit front plastic screws.
- 7) Refit engine cowl.
- 8) Fit 1" strip velcro to front of fairing at head cushion area. Discard old head cushion and attach new. Tie safety cord around pylon and fasten with a reef knot. Trim excess cord.

Always have someone other than yourself check your work!

PEGASUS

AVIATION

Sheet [1] of [3]


RETROFITTING OF QUASAR 503 PYLON FAIRING

FITTING OF RUBBER STRIPS
FOR TOP OF FAIRING MOUNTING



CUT 4 STRIPS.
X 50mm LONG.
PART N° PSS-001.
FIT CENTRALLY ON
EACH FACE

VERTICAL POSITIONING

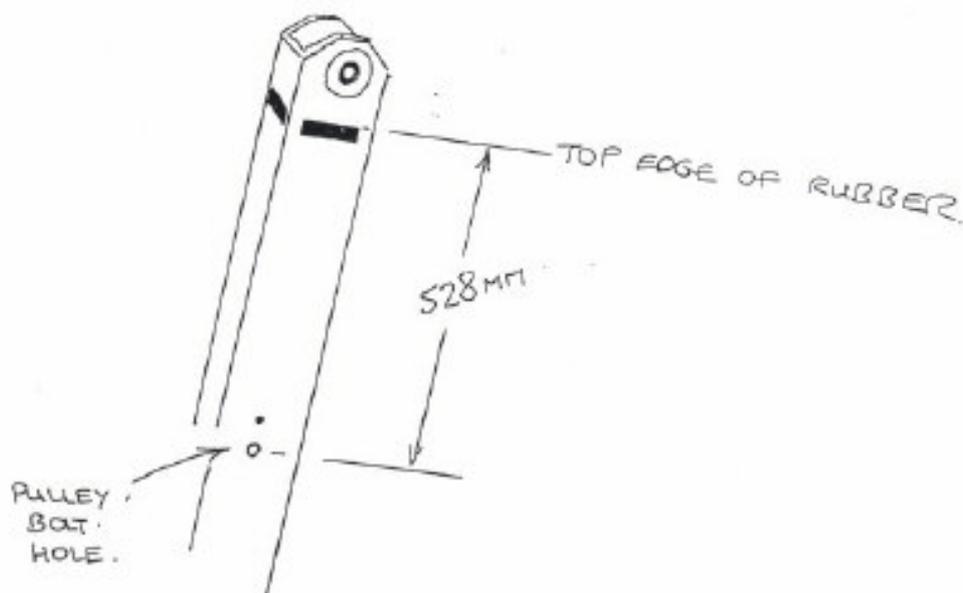

PEGASUS

AVIATION

108817


ASSEMBLY PYLON FAIRING TO PYLONS SHEET 3 of 3

ENTRY	LEFT HAND SIDE
NO OFF	1

NB - DO NOT FIT WASHER UNDER BOLT HEAD

FASTENER	HEAD	DIA / THREAD	LENGTH	NUT	NYLOC
BOLT	HEX	M6	90mm	HALF	✓

OTHER INSTRUCTIONS
USE EXISTING BOLT + 1 MYLAR WASHER.

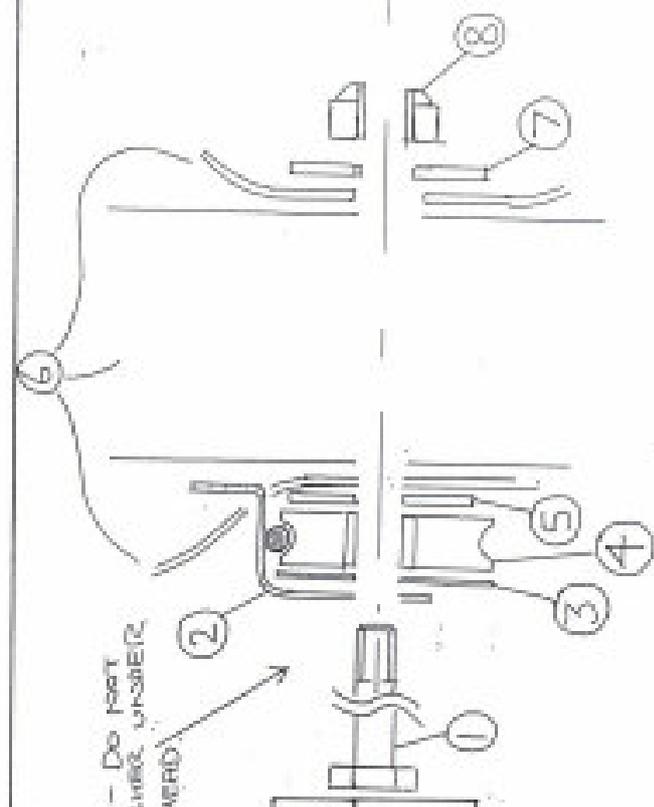

SEQUENCE →

ITEM	DESCRIPTION	QTY	DATE	APPROVED	DATE	SCALE
1	PULLEY GUARD	1				
2	MYLAR WASHER	1				
3	PULLEY ASSY	1				
4	PENNY WASHER	1				
5	FAIRING / PYLONS	1				
6	NUT	1				
7	BOLT	1				
8	BRACKET	1				

TORQUE

QUASAR

DRAWN: [Signature]

FOR ALL INFORMATION